


EKC SPREAD ANCHOR RING CLUTCH

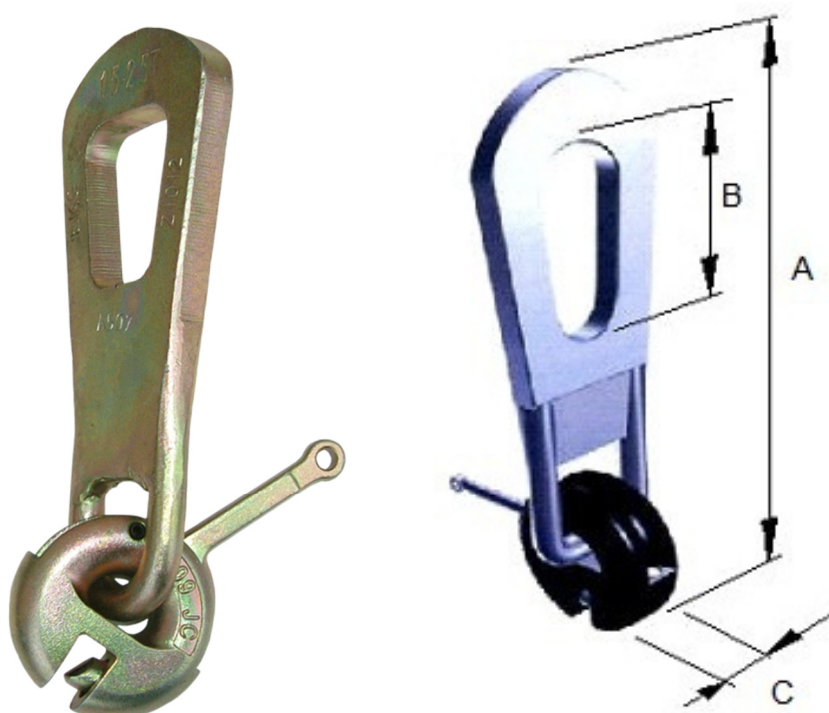

The ring clutch is used in conjunction with the spread anchor system. Even under load, movement is possible and if correctly fitted uncoupling is impossible.

Note: Clutches are suitable to fit a range of anchor plate sizes as below.

0.7T to 2.5T anchor plates = 2.5T Ring Clutch

3.0T to 5.0T anchor plates = 5T Ring Clutch

5.3T to 10.0T anchor plates = 10T Ring Clutch

SWL TONNE	Code	A (mm)	B (mm)	C (mm)	Weight (Kg)
2.5	640255	265	70	27	1.80
5.0	640505	330	85	36	3.80
10.0	641005	425	110	50	9.70